

Particulate Filter F01

= "Most Popular"

Specifications

Flow Capacity*	17.0 SCFM (8 dm ³ /s)	
Maximum Supply Pressure	200 PSIG (13.8 bar)	
Operating Temperature	32° to 150°F (0° to 65.5°C)	
Port Size	NPT / BSPT-Rc	1/4
Standard Filtration	5 Micron	
Weight	.13 lb. (.06 kg)	

* Inlet pressure 150 PSIG (10.3 bar). Pressure drop 5 PSIG (0.3 bar).

"F" Series Filters, Type "A" 5 micron elements: All Wilkerson Type "A" 5 micron elements **meet or exceed ISO Class 3** for maximum particle size and concentration of solid contaminants.


Materials of Construction

Baffle	Aluminum
Body	Aluminum
Filter Element	Sintered Polyethylene
Seals	Nitrile

F01-02-000

In-Line Filter

This small, aluminum in-line filter is designed to provide protection for portable pneumatic hand tools. It weighs only 2 ounces with a throw-away filter element rated at 5 microns. Either port may be used as the inlet port. Flow is 17 SCFM (8 dm³/s) at 90 PSIG (6.2 bar) inlet pressure with 5 PSIG (0.3 bar) pressure drop.



Dimensions

Models	Inches (mm)	A	B	C
Standard Unit F01-02-000		2.50 (63.5)	1.00 (25)	.51 (13)


B

Filters, Regulators, Lubricators

= "Most Popular"

Replacement Element Kits

Type "A", 5 Micron FRP-95-199

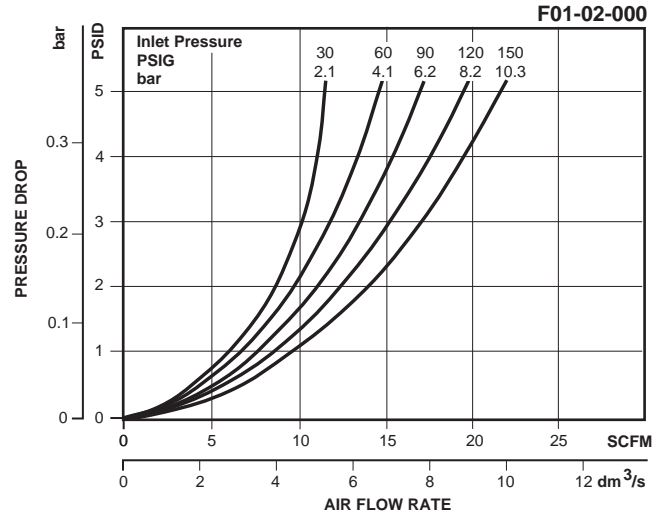

B
Filters, Regulators, Lubricators

Ordering Information

Model Type	Port Size	Standard Unit
In-Line Filter	1/4	F01-02-000

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.