

# AC centrifugal fan

backward-curved, single-intake  
with housing (flange)

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142



## Nominal data

Type	G2D160-AF02-01				
Motor	M2D068-EC				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Wiring		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Method of obtaining data		ml	ml	ml	ml
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min <sup>-1</sup>	2300	2550	2300	2550
Power consumption	W	305	335	305	335
Current draw	A	0.83	0.9	0.48	0.52
Min. back pressure	Pa	0	300	0	300
Min. back pressure	inH <sub>2</sub> O	0	1.2	0	1.2
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	50	40	50	40
Starting current	A	1.75	1.65	1.0	0.95

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

	Actual	Req. 2015				
01 Overall efficiency $\eta_{es}$	%	34	32.5	09 Power consumption $P_e$	kW	0.15
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	390
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	501
04 Efficiency grade N		45.5	44	10 Speed (rpm) n	min <sup>-1</sup>	2685
05 Variable speed drive		No		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-39223



# AC centrifugal fan

backward-curved, single-intake  
with housing (flange)

## Technical description


<b>Weight</b>	4 kg
<b>Fan size</b>	160 mm
<b>Rotor surface</b>	Unpainted
<b>Impeller material</b>	Sheet steel, sendzimir galvanized
<b>Housing material</b>	Die-cast aluminum
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP44
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	F1-1
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Any
<b>Condensation drainage holes</b>	None
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	< 0.75 mA
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 60335-1, motor does not have factory-installed overheating protection; CE
<b>Approval</b>	CCC



# AC centrifugal fan

backward-curved, single-intake  
with housing (flange)

## Product drawing

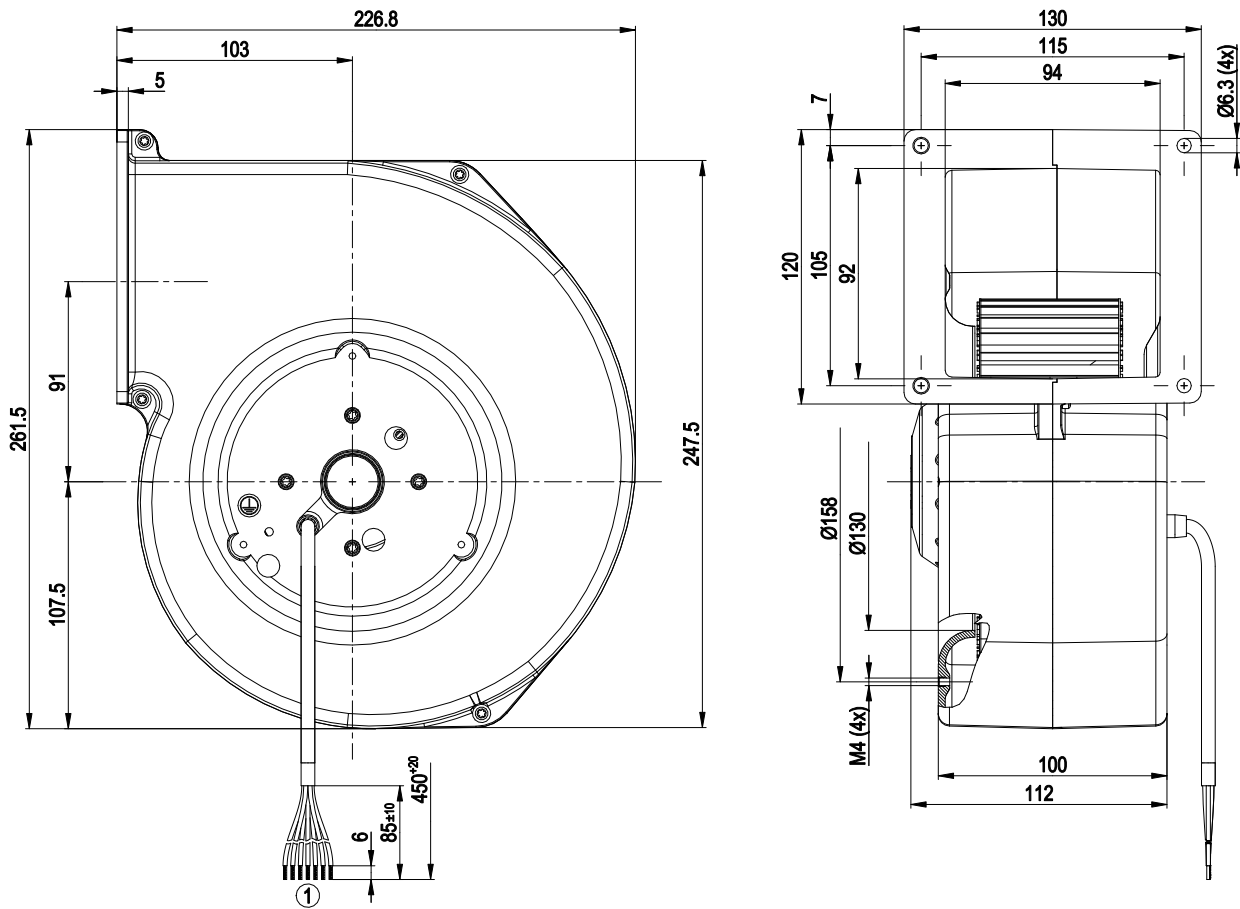


1 Cable PVC, 7x crimped splices



# AC centrifugal fan

backward-curved, single-intake  
with housing (flange)

## Connection diagram

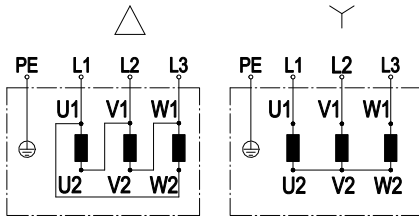


Change of rotation direction by reversing two phases

	Three-phase motor	Δ	Delta connection	Y	Star connection
L1	= U1 = black	L2	= V1 = blue	L3	= W1 = brown
U2	green	V2	white	W2	yellow
PE	green/yellow				

# AC centrifugal fan

backward-curved, single-intake  
with housing (flange)

## Curves: Air performance 50 Hz

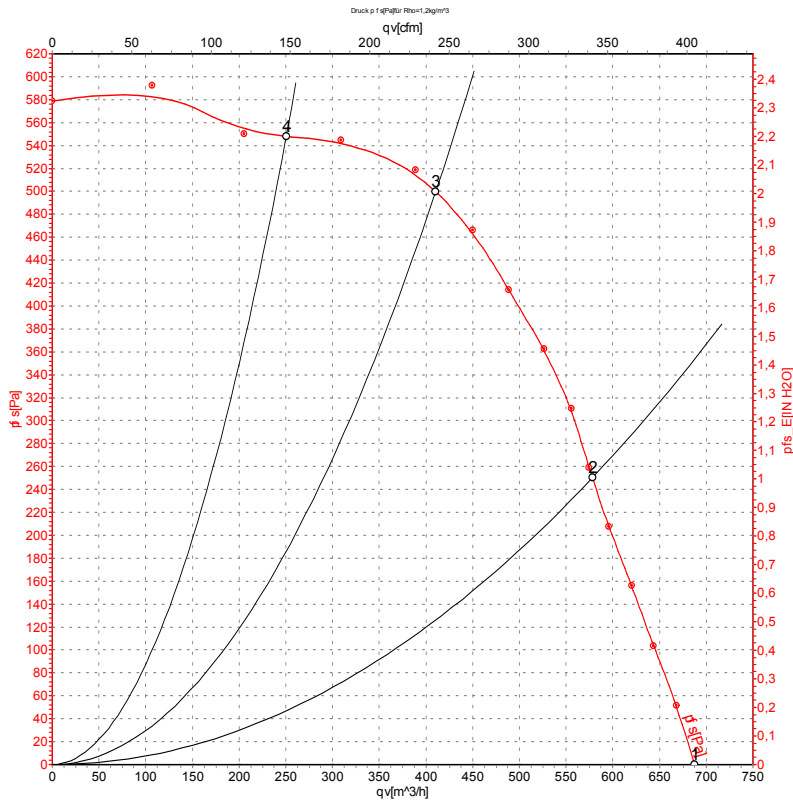

Measurement: LU-39223-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv	p <sub>fs</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m³/h	Pa	CFM	inH <sub>2</sub> O
1	400	50	2300	305	0.48	690	0	405	0.00
2	400	50	2470	242	0.39	580	250	340	1.00
3	400	50	2665	168	0.29	410	500	240	2.01
4	400	50	2790	114	0.23	250	548	145	2.20


U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase



# AC centrifugal fan

backward-curved, single-intake  
with housing (flange)

## Curves: Air performance 60 Hz

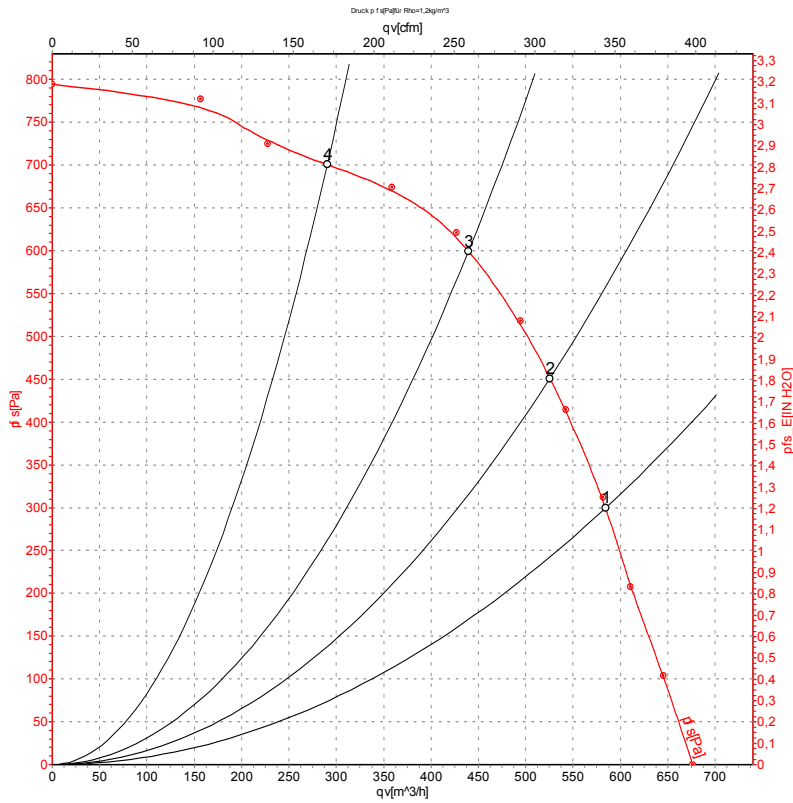

Measurement: LU-39224-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv	p <sub>fs</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	CFM	inH <sub>2</sub> O
1	400	60	2550	335	0.52	585	300	345	1.20
2	400	60	2720	296	0.46	525	450	310	1.81
3	400	60	2905	247	0.39	440	600	260	2.41
4	400	60	3145	176	0.29	290	700	170	2.81

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

