

# Super Mox Series

## High Voltage



High-voltage Super Mox resistors have been developed to meet the precision temperature stability requirements of high-accuracy and high-voltage systems. Super Mox combines proprietary non-inductive resistance system and design to achieve low temperature coefficient, low voltage coefficients, high stability and increased high operating voltages. These resistors are designed to meet the demanding



Uncoated resistor element pictured for demonstration purposes only. Finished product is coated with silicone.

requirements of high voltage power supplies, electron microscopes, X-ray systems, high resolution CRT displays and geophysical instruments.

### SERIES SPECIFICATIONS


Series	Power Rating (W)	Max. Oper. Voltage	Res. Range ( $\Omega$ )	VCR*
MOX910	3.80	15,000	1K-500M	0.40
			500M-5G	0.75
MOX920	5.00	21,000	1K-1G	0.20
			1G-10G	0.40
MOX930	7.50	30,000	1K-1G5	0.15
			1G5-15G	0.30
MOX940	10.00	45,000	1K-2G5	0.10
			2G5-25G	0.15
MOX950	13.50	60,000	1K-3G	0.08
			3G-30G	0.12
MOX960	16.00	72,000	1K-4G	0.06
			4G-40G	0.10
MOX970	20.00	90,000	1K-5G	0.04
			5G-50G	0.08

\* typical values, contact factory for details

### CHARACTERISTICS

<b>Resistance Range</b>	from 1K $\Omega$ to 50G $\Omega$ on all models (contact Ohmite for 51G to 1T $\Omega$ )	<b>Insulation Resistance</b>	>10,000 M $\Omega$	500 Volt 25 °C 75% relative humidity
<b>Tolerances</b>	0.05%, 0.1%, 0.25%, 0.5%, 1%, 2%, 5%, 10% (0.05% avail. to 10G, 0.25% to 100G, other on request)	<b>Dielectric Strength</b>	>1,000 Volt	25 °C 75% relative humidity
<b>Temperature Coefficients</b>	5, 10, 15, 25, 50 and 100ppm/°C (10ppm/°C available to 10G, 25ppm/°C to 100G, other on request. Temperature coefficient referenced to 25°C, $\Delta R$ taken at +125°C.	<b>Thermal Shock</b>	$\Delta R/R < 0.1\%$ typ., 0.20% max.	MIL Std. 202, method 107 Cond. C (IEC 68 -2 -14)
<b>Encapsulation</b>	Silicone Conformal Coating	<b>Overload</b>	$\Delta R/R < 0.1\%$ typ., 0.25% max.	1,5 x Pnom, 5 sec (do not exceed max. voltage)
<b>Terminal Material</b>	Gold Plated	<b>Moisture Resistance</b>	$\Delta R/R < 0.1\%$ typ., 0.25% max.	MIL Std. 202, method 106 (IEC 68 -2 -3)
<b>Core Material</b>	Al <sub>2</sub> O <sub>3</sub> (96%)	<b>Load Life</b>	$\Delta R/R < 0.1\%$ typ., 0.25% max.	1000 hours at rated power (IEC 115 -1)
<b>Resistor Material</b>	Ruthenium Oxide			
<b>Operating Temperature</b>	-55°C to 225°C (extended temperature range to 350°C available)			

### Derating

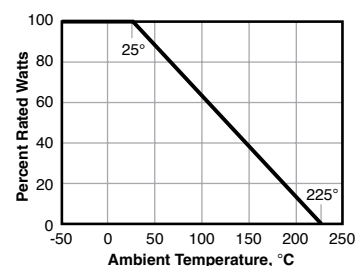


(continued)

# Super Mox Series

## High Voltage

### DIMENSIONS

(iin./mm)

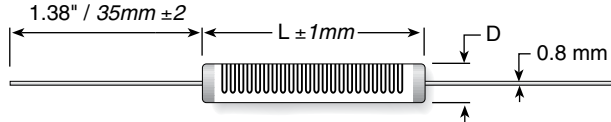

Series	L	D
MOX910	1.07/ 27.00	0.32/8.00
MOX920	1.46/ 37.00	0.32/8.00
MOX930	2.05/ 52.00	0.32/8.00
MOX940	3.03/ 77.00	0.32/8.00
MOX950	4.02/102.00	0.33/8.30
MOX960	4.80/122.00	0.34/8.50
MOX970	5.98/152.00	0.34/8.50

### ORDERING INFORMATION

#### Coating

2 = conformal silicone standard

3 = conformal silicone high temp. with 350°C burn in

E = RoHS compliant

**MOX91021006JTE**

Super Mox Series  
see chart for wattage

**Ohms**  
First 3 digits are significant; 4th digit is multiplier (# of zeroes to follow). Examples:  
1001 = 1000Ω  
1503 = 150,000Ω  
1006 = 100 MΩ

**Tolerance\***  
A = 0.05%  
B = 0.10%  
C = 0.25%  
D = 0.5%  
F = 1%  
G = 2%  
J = 5%  
K = 10%

**TCR**  
T = 100ppm  
V = 50ppm  
W = 25ppm  
X = 15ppm  
Y = 10ppm

\*Extremely tight tolerances not available across the full resistance range. Consult factory.

Part Number	Watts	Ohms 1% tol.	TCR
MOX91021004FVE	3.8W	1M	50ppm
MOX91025004FVE	3.8W	5M	50ppm
MOX91021005FVE	3.8W	10M	50ppm
MOX91022505FTE	3.8W	25M	100ppm
MOX92021005FVE	5W	10M	50ppm
MOX92025005FVE	5W	50M	50ppm
MOX92021006FVE	5W	100M	50ppm
MOX92021007FTE	5W	1000M	100ppm
MOX93021004FVE	7.5W	1M	50ppm
MOX93025004FVE	7.5W	5M	50ppm
MOX93021005FVE	7.5W	10M	50ppm
MOX93022505FTE	7.5W	25M	100ppm
MOX94021005FVE	10W	10M	50ppm
MOX94025005FVE	10W	50M	50ppm
MOX94021006FVE	10W	100M	50ppm
MOX94021007FTE	10W	1000M	100ppm
MOX95021004FVE	13.5W	1M	50ppm
MOX95025004FVE	13.5W	5M	50ppm
MOX95021005FVE	13.5W	10M	50ppm
MOX95022505FTE	13.5W	25M	100ppm
MOX96021005FVE	16W	10M	50ppm
MOX96025005FVE	16W	50M	50ppm
MOX96021006FVE	16W	100M	50ppm
MOX96021007FTE	16W	1000M	100ppm
MOX97021004FVE	20W	1M	50ppm
MOX97025004FVE	20W	5M	50ppm
MOX97021005FVE	20W	10M	50ppm
MOX97022505FTE	20W	25M	100ppm

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Ohmite:

[MOX92021007FTE](#) [MOX92022505FTE](#) [MOX94021007FTE](#) [MOX91021004FVE](#) [MOX91025004FVE](#)  
[MOX91021005FVE](#) [MOX92021005FVE](#) [MOX92025005FVE](#) [MOX92021006FVE](#) [MOX92021007FVE](#)  
[MOX93021004FVE](#) [MOX93025004FVE](#) [MOX93021005FVE](#) [MOX93022505FVE](#) [MOX94021005FVE](#)  
[MOX94025005FVE](#) [MOX94021006FVE](#) [MOX94021007FVE](#) [MOX95021004FVE](#) [MOX95025004FVE](#)  
[MOX95021005FVE](#) [MOX95022505FTE](#) [MOX96021005FVE](#) [MOX96025005FVE](#) [MOX96021006FVE](#)  
[MOX96021007FTE](#) [MOX97021004FVE](#) [MOX97025004FVE](#) [MOX97021005FVE](#) [MOX97022505FTE](#)  
[MOX9602206FTE](#) [MOX91022505FTE](#) [MOX91028505FVE](#) [MOX92021004FVE](#) [MOX91024022FYE](#)